


自润滑滚子链 SELF-LUBRICATION ROLLER CHAINS

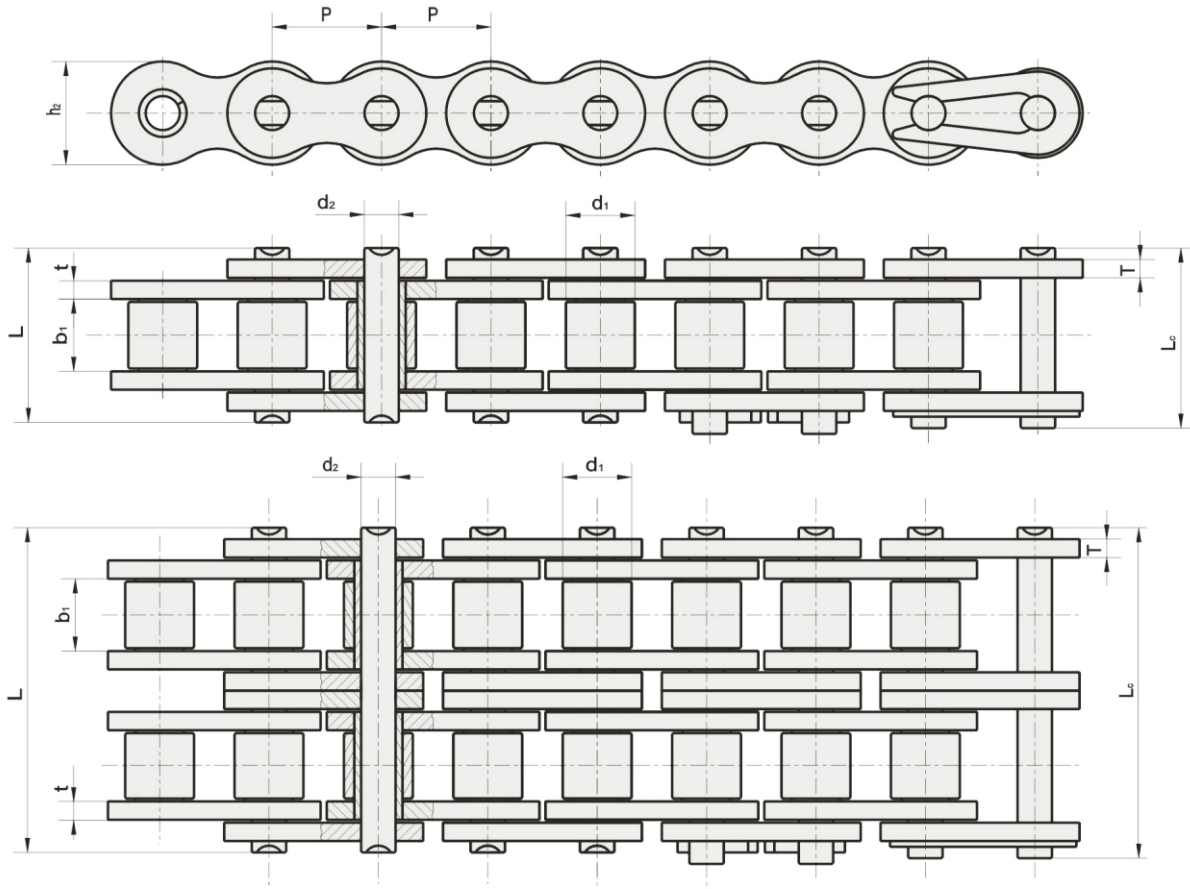

| YHK Chain No. | 节距 Pitch | 滚子直径 Roller diameter | 内节内宽 Width between inner plates | 外节内宽 Width between Outer plates | 销轴直径 Pin diameter | 销轴长度 Pin length | | 链板尺寸 Plate dimensions | | 极限拉伸载荷 Ultimate tensile strength | 每米长重 Weight per meter |
|---------------------|-------------|----------------------------|--|--|-------------------------|-----------------------|-----------------------|-----------------------------|------------|---|--------------------------------|
| | P | d ₁ max | b ₁ min | b ₂ min | d ₂ max | L max | L _c max | h ₂ max | t/T max | Q min | q |
| | mm | mm | mm | mm | mm | mm | mm | mm | mm | kN | kg/m |
| 60SLR | 19.050 | 11.91 | 12.57 | 19.35 | 5.94 | 27.5 | 29.3 | 18.0 | 3.25/2.42 | 34.2 | 1.65 |
| 08BSLR | 12.700 | 8.51 | 7.75 | 13.03 | 4.45 | 18.3 | 19.8 | 11.8 | 1.6 | 18.0 | 0.73 |
| 08BSLRF1 | 12.700 | 8.51 | 7.75 | 11.75 | 4.45 | 17.3 | 18.7 | 11.8 | 1.6 | 18.0 | 0.72 |
| 10BSLRF1 | 15.875 | 10.16 | 9.65 | 13.75 | 5.08 | 19.9 | 21.6 | 14.7 | 1.7 | 22.4 | 0.97 |
| 12BSLR | 19.050 | 12.07 | 11.68 | 15.75 | 5.72 | 22.5 | 24.2 | 16.0 | 1.85 | 29.0 | 1.20 |
| 12BSLRF1 | 19.050 | 12.07 | 11.68 | 16.13 | 5.72 | 22.9 | 24.7 | 16.0 | 1.85 | 29.0 | 1.19 |
| 16BSLR | 25.400 | 15.88 | 17.02 | 27.50 | 8.28 | 38.1 | 40.6 | 21.0 | 4.15/3.1 | 60.0 | 2.72 |
| 16BSLRF1 | 25.400 | 15.88 | 17.02 | 26.15 | 8.28 | 36.7 | 39.7 | 21.0 | 4.15/3.1 | 60.0 | 2.72 |
| 60SLR-2 | 19.050 | 11.91 | 12.57 | 42.13 | 5.94 | 50.3 | 52.1 | 18.0 | 3.25/2.42 | 68.4 | 3.21 |
| 12BSLR-2 | 19.050 | 12.07 | 11.68 | 35.21 | 5.72 | 42.0 | 43.6 | 16.0 | 1.85 | 58.0 | 2.42 |
| 16BSLR-2 | 25.400 | 15.88 | 17.02 | 57.46 | 8.28 | 68.0 | 71.0 | 21.0 | 4.15/3.1 | 106.0 | 5.68 |