




O-Ring

YHK CHAIN NO.	JAPAN CHAIN NO.	Pitch		Roller Dia. mm	Width between inner plates mm	Pin Dia mm	Pin Length		Plate Thickness		Weight		Tensile Strength		Seal Type O/X	Connecting Link	
		mm	in				mm	mm	mm	mm	kgs	lbs	KN	Lbs		Rivet	Clip
O-RING																	
420UO	420V	12.70	1/2	7.77	6.35	3.96	19.00	0.749	1.80	1.80	0.93	2.05	18.00	4045.14	O	*	*
428UO	428V	12.70	1/2	8.51	7.94	4.45	21.20	0.835	2.03	2.03	1.23	2.71	22.00	4944.06	O	*	*
520UO	520V	15.875	5/8	10.16	6.40	5.24	20.80	0.820	2.20	2.20	1.86	4.10	36.00	8090.28	O	*	*
525UO	525V	15.875	5/8	10.16	7.95	5.24	22.30	0.879	2.20	2.20	1.96	4.32	36.00	8090.28	O	*	*
530UO	530(50)V	15.875	5/8	10.16	9.40	5.24	24.90	0.981	2.42	2.42	2.27	5.00	42.00	9438.66	O	*	*
630UO	630V	19.05	3/4	11.91	9.40	5.94	25.40	1.001	2.42	2.42	2.91	6.42	49.00	11011.77	O	*	*

MR/MRS

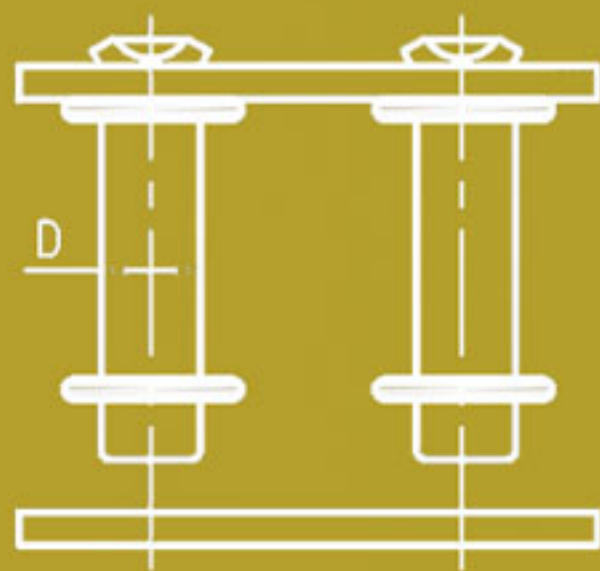

AR/ARS

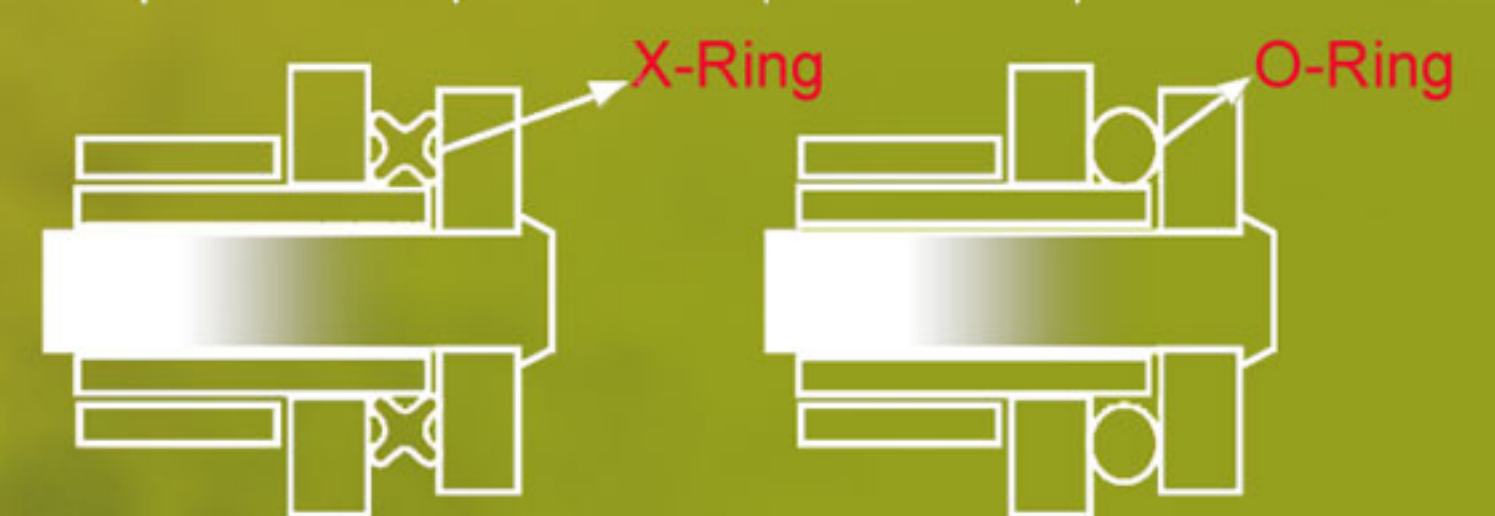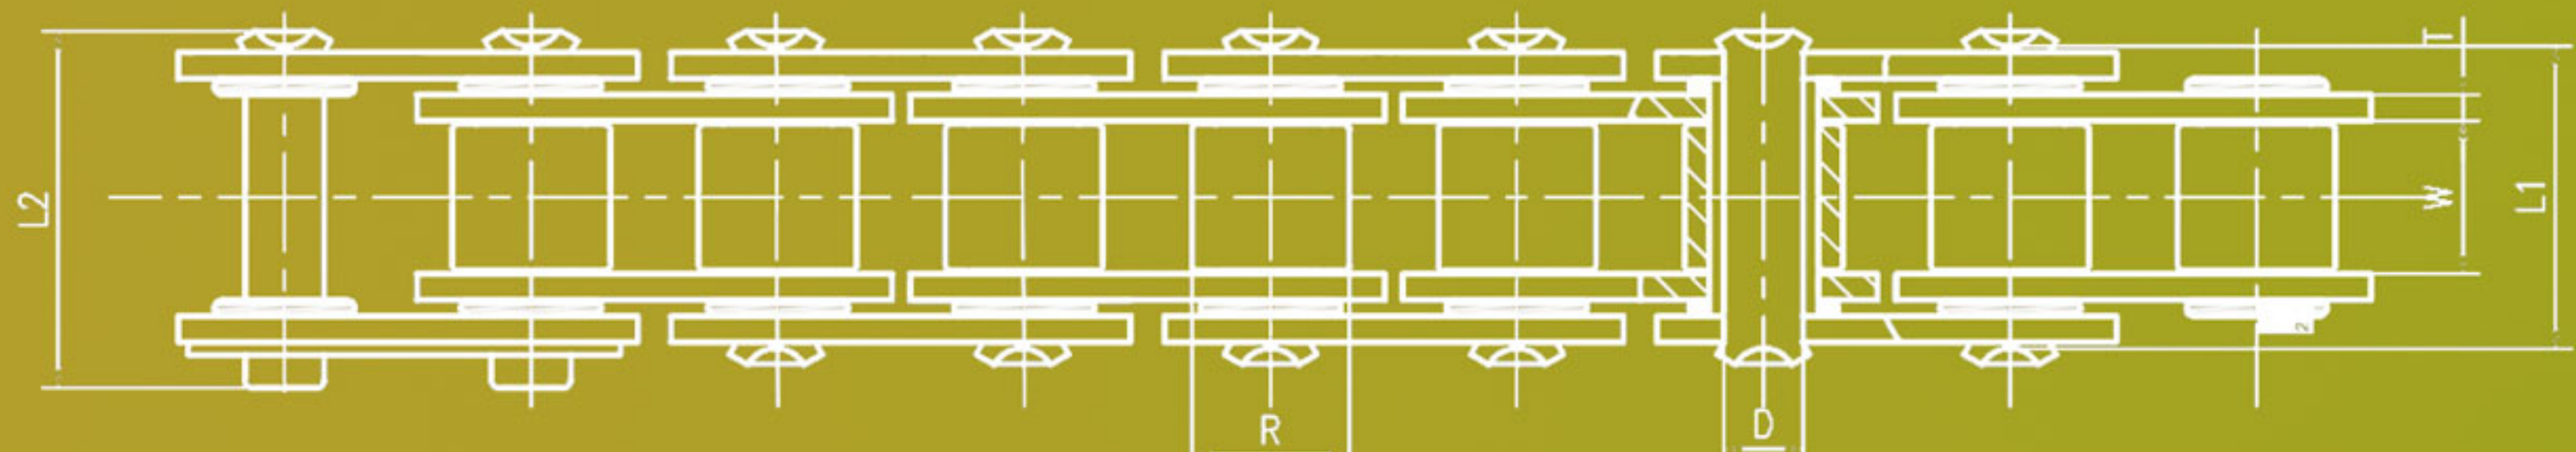

YHK O-Ring chain achieve permanent Lubrication Sealing between pin & bush which ensure with longer lifetime and minimum maintainance. With Solid Bushing, High Quality of Pin Material and 4-side riveting, YHK provide with both standard & reinforced O-Ring Chains. But YHK recommend reinforced O-Ring chains since it has even better performance which covers almost all the range of motorcycles.

* Outer Plate Color Available: Golden Finished; Silver Finished

* Painted Color Plate Available: Red, Yellow, Orange, Green, Blue